

Multiports

M4-SR10



Media Type

Hydraulic Oil, Air - Vacuum



Max. Speed

250 RPM



Max. Pressure

250 BAR



Max. Temperature

80 °C






Connection Type

NPT, BSPP, BSPT



Rotor Size

2 x 1/4" - 12 x 3/4"

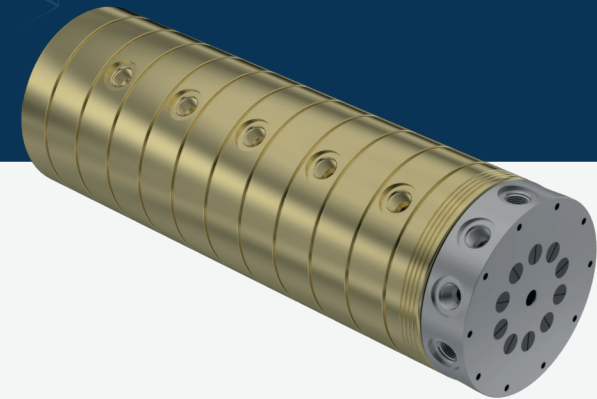


- ✓ Multi flow design
- ✓ Self supported design
- ✓ Dynamic carbon teflon sealing
- ✓ Special design sealing part for different fluids
- ✓ BSP,NPT metric threads inlet's & outlet's
- ✓ Chrom plated sealing surface
- ✓ Brass body
- ✓ Custom connections types are available

Multi-pass rotary unions.



Do not operate without fluid.

DIMENSIONS

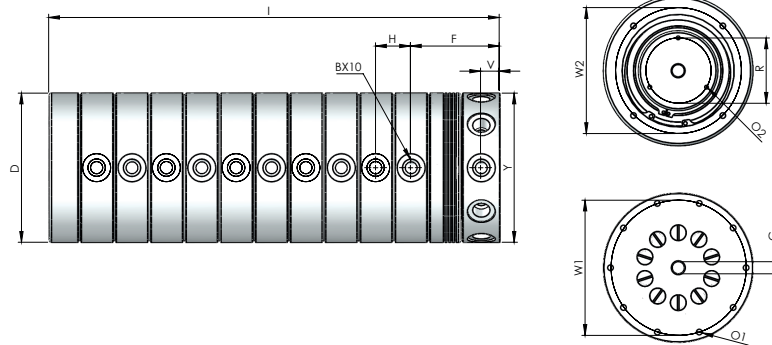

SIZE	MODEL NO	B	YØ	B2	DØ	F	H	I	V	GØ	W1Ø	W2Ø	RØ	O1	O2	KG
10 X 1/4"	M4-410081-200	1/4" NPT	130	1/4" NPT	130	77,55	25,40	353,40	12,50	7	115	115	45	M6X20	M4X20	33,10
10 X 1/4"	M4-410082-200	1/4" BSP	130	1/4" BSP	130	77,55	25,40	353,40	12,50	7	115	115	45	M6X20	M4X20	33,10
10 X 1/4"	M4-410083-200	1/4" BSPP	130	1/4" BSPP	130	77,55	25,40	353,40	12,50	7	115	115	45	M6X20	M4X20	33,10
10 X 3/8"	M4-410101-200	3/8" NPT	150	3/8" NPT	150	72,70	30	400,50	15	10	135	135	50	M6X20	M3X10	52
10 X 3/8"	M4-410102-200	3/8" BSP	150	3/8" BSP	150	72,70	30	400,50	15	10	135	135	50	M6X20	M3X10	52
10 X 3/8"	M4-410103-200	3/8" BSPP	150	3/8" BSPP	150	72,70	30	400,50	15	10	135	135	50	M6X20	M3X10	52
10 X 1/2"	M4-410151-200	1/2" NPT	160	1/2" NPT	160	95,20	37,40	483,15	20	13	145	135	70	M6X20	M4X10	70,70
10 X 1/2"	M4-410152-200	1/2" BSP	160	1/2" BSP	160	95,20	37,40	483,15	20	13	145	135	70	M6X20	M4X10	70,70
10 X 1/2"	M4-410153-200	1/2" BSPP	160	1/2" BSPP	160	95,20	37,40	483,15	20	13	145	135	70	M6X20	M4X10	70,70