Swivel Joint

E2-FFS4 Series

Media Type
Hydraulic Oil, Water + General Purpuse

Max. Speed
20 RPM

Max. Pressure
100-200 BAR

Max. Temperature
120 °C

Connection Type
FL

Rotor Size
3/4” DN20 - 8” DN200

- Single flow design, vertical rotation
- Stainless steel material
- Hardened inner sealing surface
- Special design sealing components
- Easy changable repair parts
- All flage types are aviable DIN, ANSI etc..

Swivel Joint for water, hydraulic oil, gress and chemical fluids

Do not operate without fluid.

DIMENSIONS

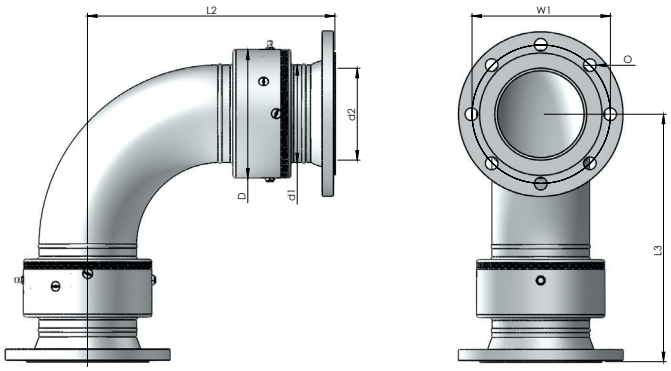

SIZE	MODEL NO	DØ	L2	L3	d1Ø	d2Ø	W1Ø	OØ	KG
20	E2 - FF4-020-304	72	142	142	26,90	21,10	75	14 X4	5
25	E2 - FF4-025-304	78	149	149	33,70	27,30	85	14 X4	5,81
32	E2 - FF4-032-304	88	193	193	42,40	35,20	100	18 X 4	9,70
40	E2 - FF4-040-304	100	204	204	48,30	36,90	110	18 X 4	12,78
50	E2 -FF4-050-304	118	221	221	60,30	48,50	125	18 X 4	16,69
65	E2 - FF4-065-304	133	250	250	76,10	59	145	18 X 8	22,87
80	E2 - FF4-080-304	139	275	275	88,90	82,50	160	18 X 8	23,37
100	E2 - FF4-100-304	175	314	314	114,30	107,10	180	18 X 8	33,92
125	E2 - FF4-125-304	199	385	385	139,70	131,70	210	18 X 8	50,71
150	E2 - FF4-150-304	222	429	429	168,30	159,30	240	22 X 8	61,05
200	E2 - FF4-200-304	288	547	547	219,10	207,30	295	22 X 12	119,75

Rototech® All Rights Reserved.