Multiports

M4-A10

Media Type
Hydraulic Oil, Air - Vacuum

Max. Speed
250 RPM

Max. Pressure
250 BAR

Max. Temperature
80 °C

Connection Type
NPT, BSPP, BSPT

Rotor Size
2 x 1/4” - 12 x 3/4”

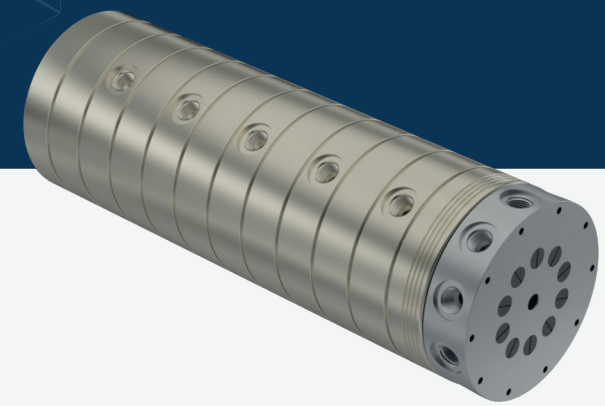



- Multi flow design
- Self supported design
- Dynamic carbon teflon sealing
- Special design sealing part for diffrent fluids
- BSP,NPT metric threads inlet’s & outlet’s
- Chrom plated sealing surface
- Aluminium body
- Custom connections types are avaible

Multi-passage rotary unions.

Do not operate without fluid.

DIMENSIONS

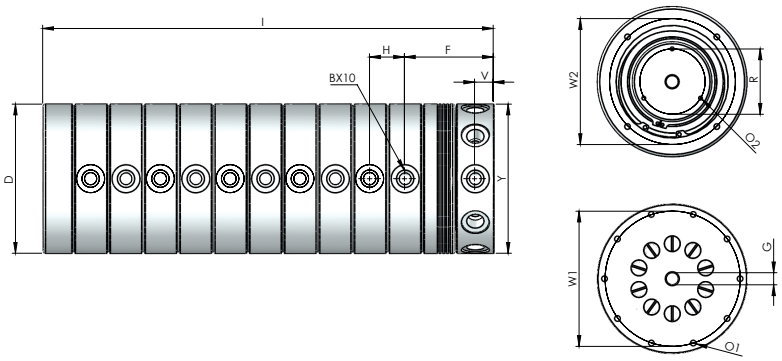

SIZE	MODEL NO	B	YØ	B2	DØ	F	H	I	V	GØ	W1Ø	W2Ø	RØ	O1	O2	KG
10 X 1/4”	M4-310081-200	1/4” NPT	130	1/4” NPT	130	77,55	25,40	353,40	12,50	7	115	115	45	M6X20	M4X20	20
10 X 1/4”	M4-310082-200	1/4” BSP	130	1/4” BSP	130	77,55	25,40	353,40	12,50	7	115	115	45	M6X20	M4X20	20
10 X 1/4”	M4-310083-200	1/4” BSPP	130	1/4” BSPP	130	77,55	25,40	353,40	12,50	7	115	115	45	M6X20	M4X20	20
10 X 3/8”	M4-310101-200	3/8” NPT	150	3/8” NPT	150	72,70	30	400,50	15	10	135	135	50	M6X20	M3X10	31,30
10 X 3/8”	M4-310102-200	3/8” BSP	150	3/8” BSP	150	72,70	30	400,50	15	10	135	135	50	M6X20	M3X10	31,30
10 X 3/8”	M4-310103-200	3/8” BSPP	150	3/8” BSPP	150	72,70	30	400,50	15	10	135	135	50	M6X20	M3X10	31,30
10 X 1/2”	M4-310151-200	1/2” NPT	160	1/2” NPT	160	95,20	37,40	483,15	20	13	145	135	70	M6X20	M4X10	43,80
10 X 1/2”	M4-310152-200	1/2” BSP	160	1/2” BSP	160	95,20	37,40	483,15	20	13	145	135	70	M6X20	M4X10	43,80
10 X 1/2”	M4-310153-200	1/2” BSPP	160	1/2” BSPP	160	95,20	37,40	483,15	20	13	145	135	70	M6X20	M4X10	43,80

Rototech® All Rights Reserved.