

Multiports M3-C3

Media Type
Hydraulic Oil, Air - Vacuum

Max. Speed
250 RPM

Max. Pressure
250 BAR

Max. Temperature
80 °C

Connection Type
NPT, BSPP, BSPT

Rotor Size
2 x 1/4" - 12 x 3/4"




- ✓ Threaded connection
- ✓ Self supported design
- ✓ Dynamic carbon teflon sealing
- ✓ Special design sealing part for different fluids
- ✓ Chrom plated sealing surface
- ✓ Carbon steel body
- ✓ Custom connections types are available

Multi-passage rotary unions.

! Do not operate without fluid.

DIMENSIONS

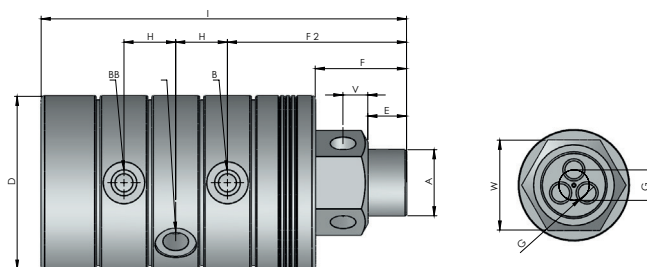

SIZE	MODEL NO	B	A (RH)	GØ	E	F	DØ	I	F2	H	V	GWØ	W	KG
3 X 1/4"	M3-13081-2110	1/4" NPT	1" NPT	7	19	57	80	188	98	23,40	17	15	46	4,75
3 X 1/4"	M3-13082-2210	1/4" BSP	1" BSP	7	19	57	80	188	98	23,40	17	15	46	4,75
3 X 1/4"	M3-13083-2310	1/4" BSPP	1" BSPP	7	19	57	80	188	98	23,40	17	15	46	4,75
3 X 1/4"	M3-13081-2112	1/4" NPT	1 1/4" NPT	7	28	66	80	197	107	23,40	17	20	55	5,45
3 X 1/4"	M3-13082-2212	1/4" BSP	1 1/4" BSP	7	28	66	80	197	107	23,40	17	20	55	5,45
3 X 1/4"	M3-13083-2312	1/4" BSPP	1 1/4" BSPP	7	28	66	80	197	107	23,40	17	20	55	5,45
3 X 3/8"	M3-13101-2112	3/8" NPT	1 1/4" NPT	10	28	66	80	220,30	113	30	17	18	55	6,05
3 X 3/8"	M3-13102-2212	3/8" BSP	1 1/4" BSP	10	28	66	80	220,30	113	30	17	18	55	6,05
3 X 3/8"	M3-13103-2312	3/8" BSPP	1 1/4" BSPP	10	28	66	80	220,30	113	30	17	18	55	6,05
3 X 1/2"	M3-13151-2114	1/2" NPT	1 1/2" NPT	13	28	66	125	264,20	129,50	37,40	18	22	65	17,65
3 X 1/2"	M3-13152-2214	1/2" BSP	1 1/2" BSP	13	28	66	125	264,20	129,50	37,40	18	22	65	17,65
3 X 1/2"	M3-13153-2314	1/2" BSPP	1 1/2" BSPP	13	28	66	125	264,20	129,50	37,40	18	22	65	17,65
3 X 3/4"	M3-13201-2116	3/4" NPT	2" NPT	18	30	90	135	305,20	155,50	43,40	25	27	70	22,80
3 X 3/4"	M3-13202-2216	3/4" BSP	2" BSP	18	30	90	135	305,20	155,50	43,40	25	27	70	22,80
3 X 3/4"	M3-13203-2316	3/4" BSPP	2" BSPP	18	30	90	135	305,20	155,50	43,40	25	27	70	22,80